

And had need diversing the state of the three with the three will had

thing there are a second than the transfer and the transfer and the transfer and the transfer and the transfer

FIG. 2

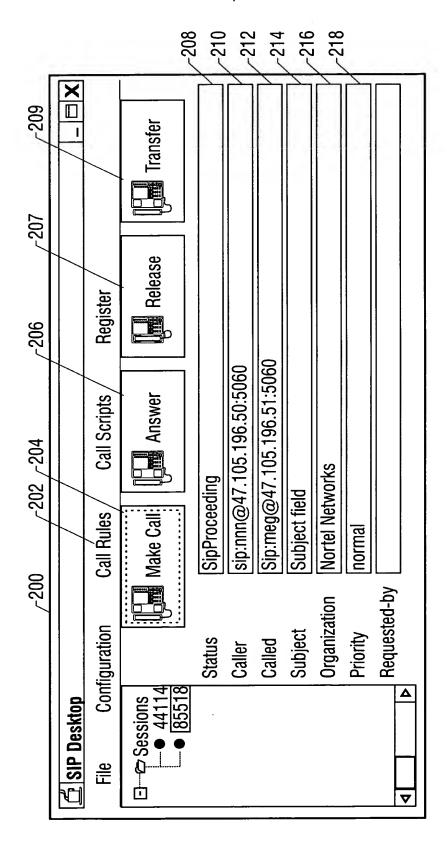


FIG. 3

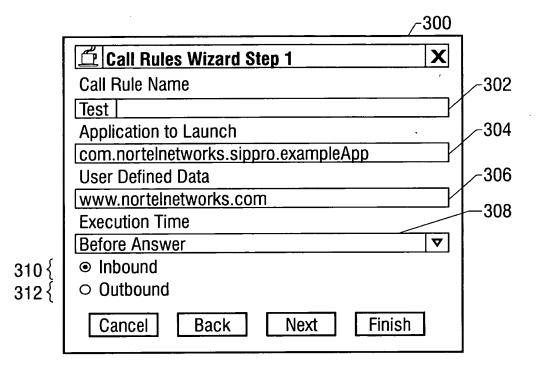


FIG. 4

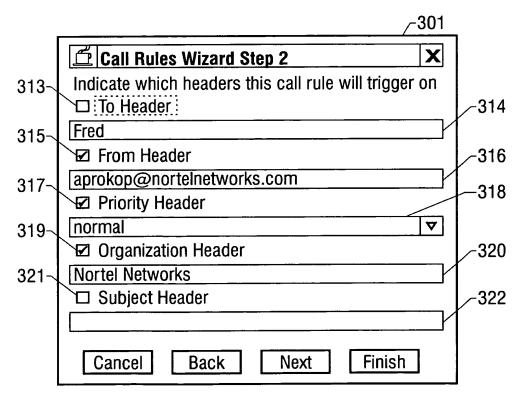


FIG. 5

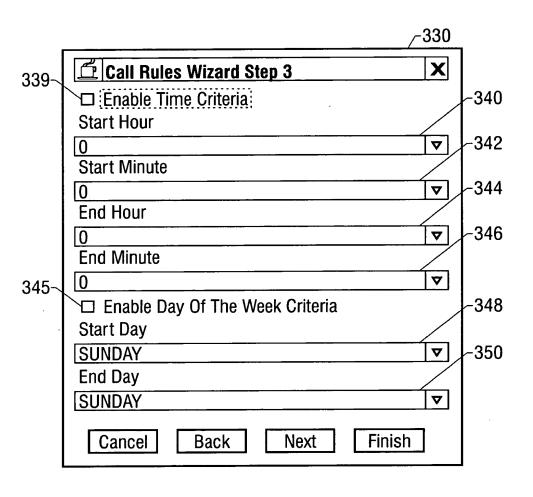


FIG. 6

then the first count through their prop in . Is write from the first the first the first through the f

OUTGOING MESSAGE to 47.105.195.50: 5060 INVITE sip:meg@47.105.196.50:5060 SIP/2.0

To: sip:meg@47.105.196.50:5060

From: sip:ajp@47.105.196.51:5060; tag=1791582439

Call-ID: 3791441467857381@47.105.196.51

CSeq: 11 INVITE

Via: SIP/2.0/UDP 47.105.196.51:5060

Priority: normal Subject: Subject field

Organization: Nortel Networks Content-Type: application/sdp

Content-Length: 251

v=0

o=ajp 4060929 4060929 IN lp4 47.105.196.51

s=nortelnetworks

p = +1 972 684 1000 (Nortelnetworks Richardson, Texas)

c=IN IP4 47.105.196.51

t = 0.0

m=audio 9000 RTP/AVP 0 3 4

a=rtpmap:0 pcmu/8000/1

a=rtpmap:3 gsm/8000/1

a=rtpmap:4 g723/8000/1

FIG. 7

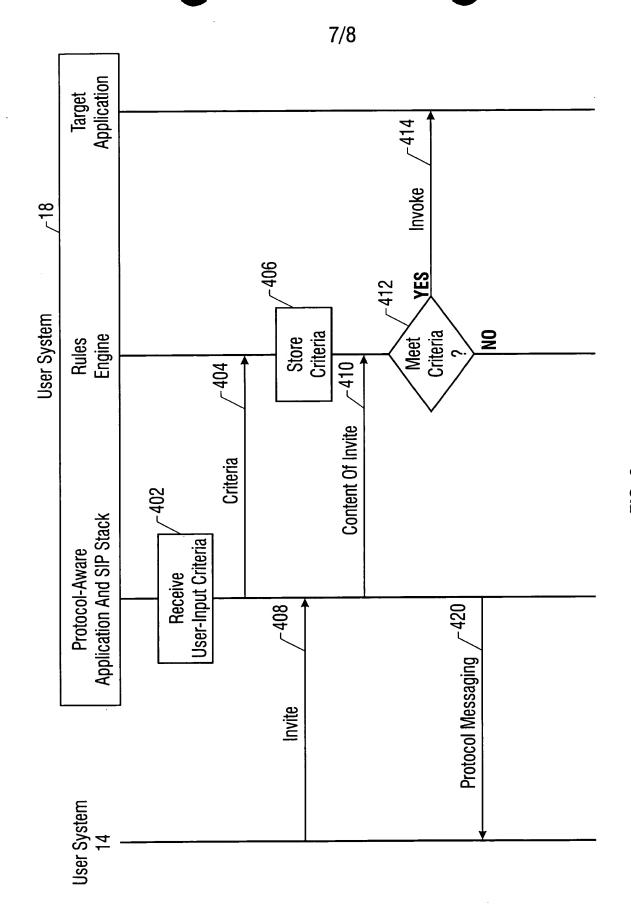


FIG. 8

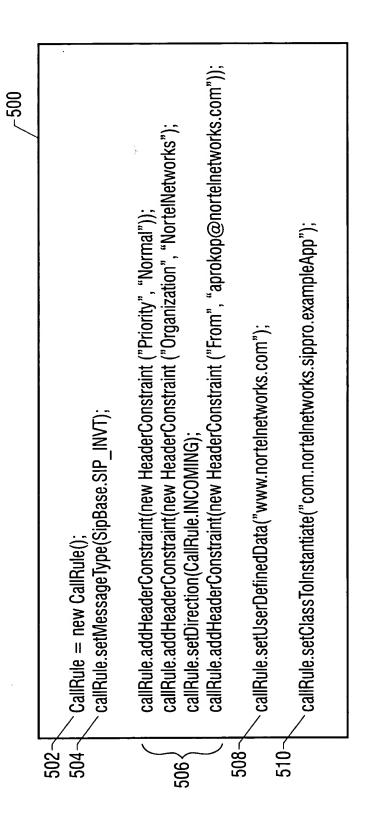


FIG. 9